



AVS-Camera-U-S FHD

mit integrierter IR-Beleuchtung / with integrated IR-lightning



Produktvarianten / Product variants


3010102	AVS-Camera-U-S 110° FHD	▪ Bildwinkel 110°	▪ Viewing angle 110°
---------	-------------------------	-------------------	----------------------

Key Facts


- Kamera mit **Shutter/Klappe**
 - **Auflösung** 1920x1080
 - **Bildsensor** CMOS 1/2.9"
 - **Gegenlichtkompensation** Automatisch
 - **Spannungsversorgung** 12V DC
 - **Stromverbrauch** ca. 220mA
 - **Bildwinkel** 110° erhältlich
 - **Beleuchtung** 0.1 Lux (Tag), 0 Lux (mit IR 3-5Meter)
 - **Schutzklasse** IP69K
 - **FPS** 25/30
 - **Betriebstemperaturbereich** -20°C bis +70°C
 - **Lagertemperaturbereich** -40°C bis +85°C
 - **Vibration** 10g
 - **Anschlusskabel** 0,9 Meter
 - **Gewicht** 0,31kg
- Camera with **Shutter**
 - **Resolution** 1920x1080
 - **Image Sensor** CMOS 1/2.9"
 - **Backlight compensation** Automatic
 - **Power supply** 12V DC
 - **Power consumption** ca. 220mA
 - **Viewing angel** 110° available
 - **Lightning** 0.1 Lux (Day), 0 Lux (with IR 3-5Meter)
 - **Protection class** IP69K
 - **FPS** 25/30
 - **Operating temperature** -20°C to +70°C
 - **Storage temperature** -40°C to +85°C
 - **Vibration** 10g
 - **Cable** 0,9 Meter
 - **Weight** 0,31kg

Stecker / Connector

GX-12 aviation 4p - Buchse, IP67
GX-12 aviation 4p - Female, IP67



Maße / Dimensions

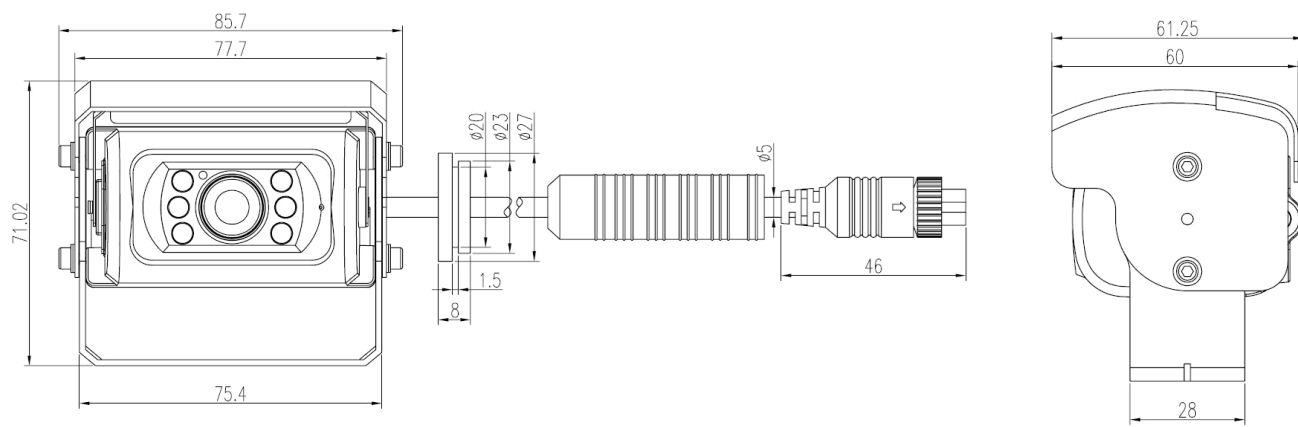

Maße in / Dimensions in mm



